


908H COMPACT WHEEL LOADER | 6T

PRODUCT SPECIFICATIONS

CAT

Engine	
Model	CAT C3.3B turbocharged, direct injection
Maximum Gross Power	55 kW
Rated Net Power - ISO 9249	52 kW
Rated Net Power - 80/1269/EEC	52 kW
Bore	94 mm
Stroke	120 mm
Displacement	3.3 L
Weights	
Operating Weight	6,465 kg
Buckets	
Rated Bucket Capacity	1.1 m ³
Operating Specifications	
Breakout Force, Bucket (ISO 14397-2:2007)	57 kN 47 kN
Rated Operating Load at Full Turn, Bucket (ISO 14397-1:2007)	1,825 kg
Straight Tipping Load, Bucket (ISO 14397-1:2007)	5,100 kg
Full Turn Static Tipping Load, Bucket (ISO 14397-1:2007)	3,650 kg
Rackback, Transport Position	52°
Rated Operating Load at Full Turn, Forks (EN 474-3:2006, Firm and Level Ground, 1.25 Stability and 500 mm Load Center)	2,355 kg
Fuel Burn	
Low	0.0 - 4.2 Litres per hour
Medium	4.2 - 8.3 Litres per hour
High	8.3 - 12.1 Litres per hour

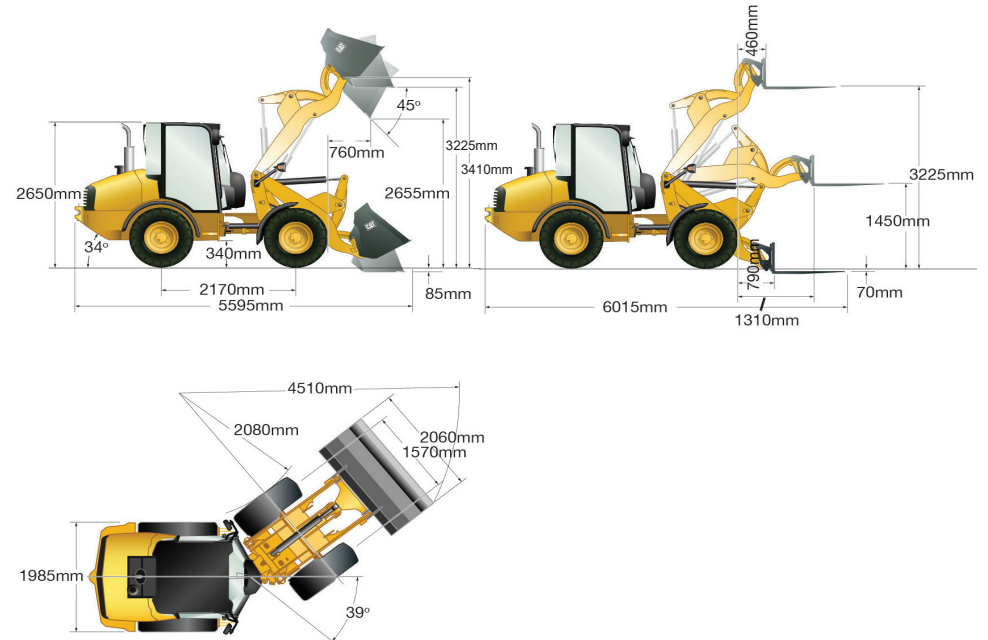

DISCLAIMER: This Product Specification Sheet was produced 01/2020. Every effort has been made to ensure that the content is accurate, however the contents are subject to change. Information contained in this Specification Sheet is for general information only and does not purport to be comprehensive, current only at the time it is placed in this document compiled from manufacturer and industry sources; and not intended to provide nor make any recommendation upon which you should rely for any purpose whatsoever. Ezyquip Hire makes no warranty express or implied, including without limitation any warranty of merchantability or fitness for any particular purpose. Ezyquip Hire shall not be liable for any special, incidental, or consequential damages or loss of profits resulting from use of or misuse of the general information provided in this document.