
950M WHEEL LOADER | 19T

PRODUCT SPECIFICATIONS

Engine	
Model	CAT C7.1 ACERT
Gross Power - SAE J1995 (2,100 rpm)	187 kW / 250 hp
Gross Power - ISO 14396 (2,100 rpm)	186 kW / 249 hp
Net Power - ISO 9249 (2,100 rpm)	171 kW / 230 hp
Net Power - SAE J1349 (2,100 rpm)	171 kW / 230 hp
Peak Torque (Net) @ 1,300 rpm SAEJ1349	1163 Nm
Bore	105 mm / 4.13"
Stroke	135 mm / 5.31"
Displacement	7.01 L / 428" ³
Weights and Capacities	
Operating	19,213 kg
Bucket Capacities	2.5 - 9.2 m ³
Operating Specifications	
Static Tipping Load - Full 40º turn with tire deflection	11,005 kg
Static Tipping Load - Full 40º turn no tire deflection	11,760 kg
Breakout Force	181 kN
Transmission	
Forward 1	6.9 km/h / 4.3 mph
Forward 2	12 km/h / 7.5 mph
Forward 3	19.3 km/h / 12.0 mph
Forward 4	25.7 km/h / 16.0 mph
Forward 5	39.5 km/h / 24.5 mph
Reverse 1	6.9 km/h / 4.3 mph
Reverse 2	12 km/h / 7.5 mph
Reverse 3	25.7 km/h / 16 mph
Fuel Burn	
Low	7.3 - 10.3 Litres per hour
Medium	10.3 - 12.4 Litres per hour
High	12.4 - 14.9 Litres per hour



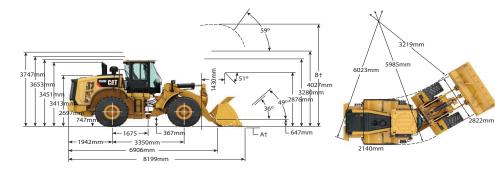

DISCLAIMER: This Product Specification Sheet was produced 01/2020. Every effort has been made to ensure that the content is accurate, however the contents are subject to change. Information contained in this Specification Sheet is: for general information only and does not purport to be comprehensive; current only at the time it is placed in this document compiled from manufacturer and industry sources; and not intended to provide nor make any recommendation upon which you should rely for any special, incidental, or consequential damages or loss of profits estilling from use of musice d the general information provide in this document.