


CC1200 VIBRATORY ROLLER | 3T

PRODUCT SPECIFICATIONS

DYNAPAC

Type	Double Drum
Masses	
Maximum Operating Mass	2,710 kg
Traction	
Speed Range (km/ h)	0-10 km/h
Vertical Oscillation	±10°
Theor. Gradeability	30 %
Compaction	
Centrifugal Force	33 kN
Static Linear Load - Front	10.5 kg/cm
Static Linear Load - Rear	11.2 kg/cm
Vibration Frequency	63 Hz
Water Tank (L)	160 L
Engine	
Model	Kubota a D1703-M (T4i)
Type	Water cooled
Rated Power - SAE J1995	26 kW (35 hp) @ 2,800 rpm
Fuel Tank Capacity	50 L
Fuel Burn	
Medium	3.3 Litres per hour
High	6.7 Litres per hour

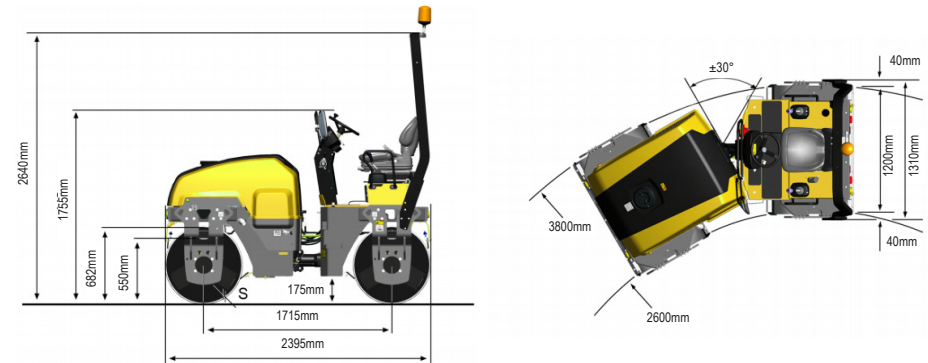

DISCLAIMER: This Product Specification Sheet was produced 01/2020. Every effort has been made to ensure that the content is accurate, however the contents are subject to change. Information contained in this Specification Sheet is: for general information only and does not purport to be comprehensive, current only at the time it is placed in this document compiled from manufacturer and industry sources; and not intended to provide nor make any recommendation upon which you should rely for any purpose whatsoever. Ezyquip Hire makes no warranty express or implied, including without limitation any warranty of merchantability or fitness for any particular purpose. Ezyquip Hire shall not be liable for any special, incidental, or consequential damages or loss of profits resulting from use of or misuse of the general information provided in this document.