
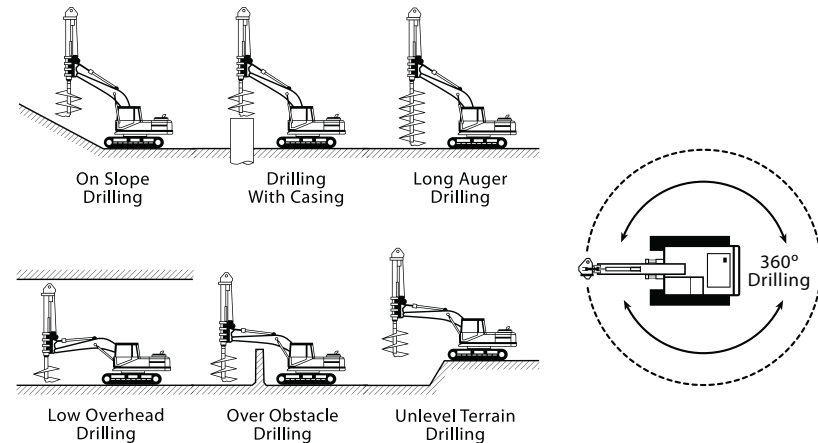


# DH20 LODRIL | 25T

## PRODUCT SPECIFICATIONS

CAT

Specification	Units
Engine Model CAT C6.4 with ACERT Technology	
Net Power at 1800rpm – ISO 9249	103 kW
Bore	102 mm
Stroke	130 mm
Displacement	6.4 L
Operating Weight	27,000 kg
<b>Lo Dril Specifications</b>	
Rotary Torque	29 kNm
Running Torque at low drill speed	
Max. Kelly Winch Line Pull (bare drum)	53 kN
Hole Diameter (Dependent on ground conditions, tooling and operation)	1,200 mm
Drill Speed Range - low/high/spin off (dependent on excavator)	30/60/100 rpm
Hole Depth - LoDril configuration specific	15 m
Attachment Height - LoDril configuration specific	6 m
Excavator Class x 1000	15 - 22 kg
Excavator modifications may be required	

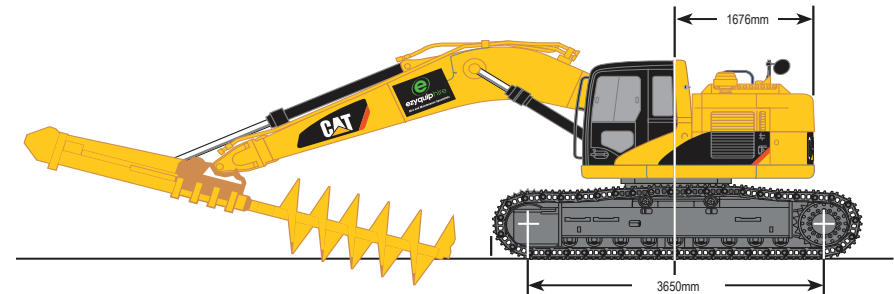

DISCLAIMER: This Product Specification Sheet was produced 01/2020. Every effort has been made to ensure that the content is accurate, however the contents are subject to change. Information contained in this Specification Sheet is: for general information only and does not purport to be comprehensive, current only at the time it is placed in this document compiled from manufacturer and industry sources; and not intended to provide nor make any recommendation upon which you should rely for any purpose whatsoever. Ezyquip Hire makes no warranty express or implied, including without limitation any warranty of merchantability or fitness for any particular purpose. Ezyquip Hire shall not be liable for any special, incidental, or consequential damages or loss of profits resulting from use of or misuse of the general information provided in this document.