


TR100 DRILL | 40T

PRODUCT SPECIFICATIONS

CAT

Specification	TR100
Max Rotary Torque	100,000 ft-lbs / 135 kNm
Max. Kelly Winch Line Pull (bare drum)	30,000 lbs / 133 kN
Hole Diameter	132" / 3,300 mm
Drill Speed Range (RPM)	10 / 40 / 100
Max. Hole Depth	80' / 24 M
Excavator Weight Class x 1000	75 - 100 lbs / 34 - 45 KG
Max. HPU Engine power	300 HP / 220 kW
Low Head Room	9.3 M
Fuel Burn	23 L/ph

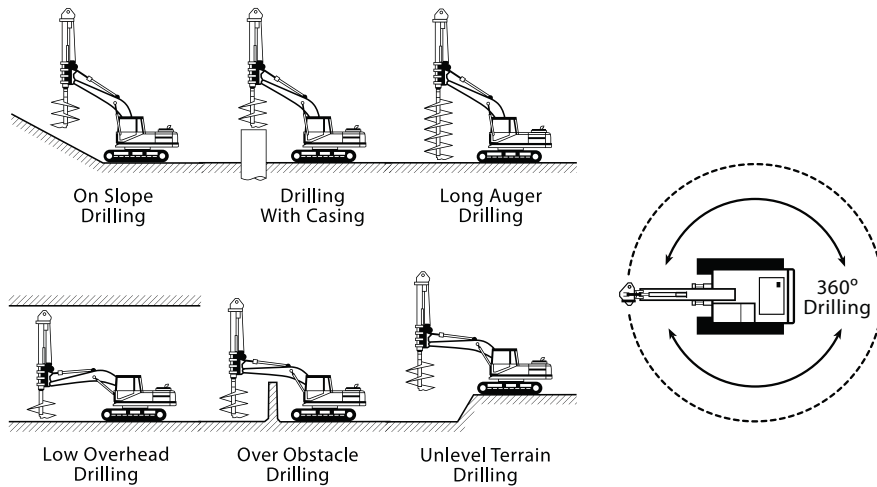

DISCLAIMER: This Product Specification Sheet was produced 01/2020. Every effort has been made to ensure that the content is accurate, however the contents are subject to change. Information contained in this Specification Sheet is for general information only and does not purport to be comprehensive, current only at the time it is placed in this document compiled from manufacturer and industry sources; and not intended to provide nor make any recommendation upon which you should rely for any purpose whatsoever. Ezyquip Hire makes no warranty express or implied, including without limitation any warranty of merchantability or fitness for any particular purpose. Ezyquip Hire shall not be liable for any special, incidental, or consequential damages or loss of profits resulting from use of or misuse of the general information provided in this document.