
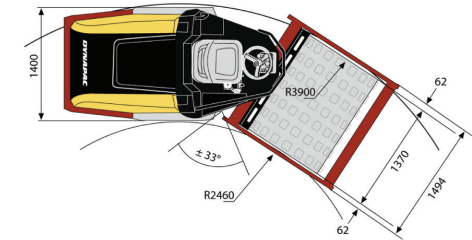


CA1354D/PD VIBRATORY ROLLER | 5T

PRODUCT SPECIFICATIONS

DYNAPAC

Type	Pad Foot / Smooth Drum
Masses	
Maximum Operating Mass	5,500 kg
Traction	
Speed Range (km/ h)	0 - 6
Vertical Oscillation	±9°
Tyre Size (8 ply)	12,5-20
Theor. Gradeability	55 %
Compaction	
Static Linear Load	13.0 kg / cm
Centrifugal Force	89 kN
Nominal Amplitude	1.7 mm
Vibration Frequency	35 Hz
Engine	
Manufacturer / Model	John Deere 5030 HF285
Type	Water cooled turbo Diesel with After Cooler
Rated Power - SAE J1995	62 kW (84 hp) @ 2,800 rpm
Fuel Tank Capacity	117 L

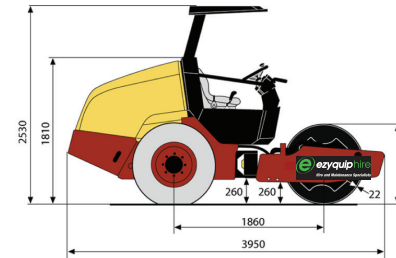

DISCLAIMER: This Product Specification Sheet was produced 01/2020. Every effort has been made to ensure that the content is accurate, however the contents are subject to change. Information contained in this Specification Sheet is: for general information only and does not purport to be comprehensive, current only at the time it is placed in this document compiled from manufacturer and industry sources; and not intended to provide nor make any recommendation upon which you should rely for any purpose whatsoever. Ezyquip Hire makes no warranty express or implied, including without limitation any warranty of merchantability or fitness for any particular purpose. Ezyquip Hire shall not be liable for any special, incidental, or consequential damages or loss of profits resulting from use of or misuse of the general information provided in this document.