
CC224HF VIBRATORY ROLLER | 9T

PRODUCT SPECIFICATIONS

Туре	Double Drum
Masses	
Maximum Operating Mass	9,000 kg
Traction	
Speed Range (km/ h)	0 - 12 km/h
Vertical Oscillation	±7°
Theor. Gradeability	42 %
Compaction	
Static Linear Load - Front	25.7 kg/cm
Static Linear Load - Rear	25.7 kg/cm
Nominal Amplitude (high/low)	0.7 mm / 0.3 mm
Vibration Frequency (high/low amplitude)	48 Hz / 67 Hz
Centrifugal Force (high/low amplitude)	78 kN / 67 kN
Water Tank	750 L
Engine	
Manufacturer	Deutz
Model	TCD 3.6 IIIB/T4i
Туре	Water cooled turbo Diesel
Rated Power - SAE J1995	75 kW (100 hp) @ 2,200 rpm
Rated Power	23 kW
Fuel Tank Capacity	130 L



USCLAMER: This Product Specification Sheet was produced 101202. Every effort has been made to ensure that the content is accurate, however the contents are subject to change. Information contained in this Specification Sheet is for general information only and des not purport to be comprehensive; current only at the time it is placed in this document compiled from manufacturer and industry sources; and not intended to provide nor make any recommendation upon which you should rely for any purpose whatsever. Ezyquip Hire makes no warranty express or implied, induding without limitation any warranty of merchantability or fitness for any particular purpose. Ezyquip Hire shall not be liable for any special, incidental, or consequential damages or loss of profix resulting from use of or misuse of the general information provide nor make any recommendation upon which is document.

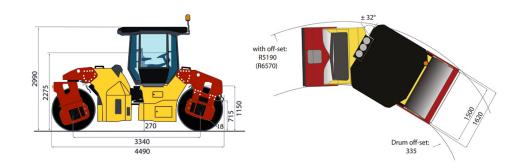

DYNAPAC