
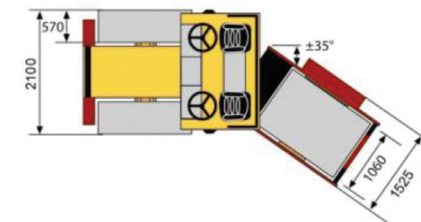


CS142D VIBRATORY ROLLER | 13T

PRODUCT SPECIFICATIONS

DYNAPAC

Type	Smooth Drum - Three Point Roller
Masses	
Operating Mass (incl. Cab)	13,200 kg
Traction	
Speed Range (km/ h)	0 - 10
Vertical Oscillation	±9°
Compaction	
Static Linear Load - Front	52 kg/cm
Static Linear Load - Rear	46 kg/cm
Static Linear Load (ballasted) - Front	60 kg/cm
Static Linear Load (ballasted) - Rear	57 kg/cm
Rolling Width	2,100 mm
Drum Overlap	50 mm
Water Tank	530 l
Engine	
Manufacturer/ Model	Deutz TD 3.6 L4 IIIB/T4F
Type	Water cooled turbo Diesel
Rated Power - SAE J1995	55 kW (74 hp) @ 2,200 rpm
Fuel Tank Capacity	110 L
Fuel Burn	
Medium	12.9 Litres per hour
High	15.8 Litres per hour

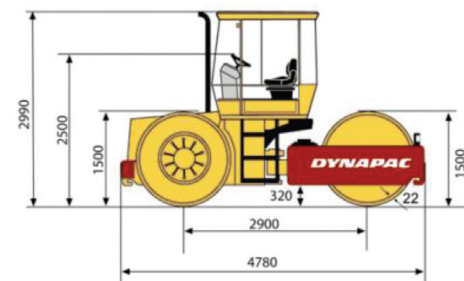

DISCLAIMER: This Product Specification Sheet was produced 01/2020. Every effort has been made to ensure that the content is accurate, however the contents are subject to change. Information contained in this Specification Sheet is: for general information only and does not purport to be comprehensive, current only at the time it is placed in this document compiled from manufacturer and industry sources; and not intended to provide nor make any recommendation upon which you should rely for any purpose whatsoever. Ezyquip Hire makes no warranty express or implied, including without limitation any warranty of merchantability or fitness for any particular purpose. Ezyquip Hire shall not be liable for any special, incidental, or consequential damages or loss of profits resulting from use of or misuse of the general information provided in this document.