



CW12 PENUMATIC TYRE ROLLER | 9T

PRODUCT SPECIFICATIONS

CAT

Type	Multi-Tyre Roller
Masses	
Standard Machine (incl. ROPS)	8,850 kg
Compaction	
Rolling Width	2,300 mm
Tyre Overlap	42 mm
Wheel Loads - Without ballast	1,250 kg
Wheel Loads - With wet sand ballast	1,600 kg
Wheel Loads - With max. ballast	3,380 kg
Tyre Pressure - Min / max	250 kPa / 850 kPa
Tyre Type (smooth)	13/80 R20
Water Tank	380 L
Engine	
Manufacturer / Model	CAT C4.4
Gross Power - Meets Tier 3, Stage IIIA, China Stage III	75 kW / 100.5 hp
Fuel Tank Capacity	208 L
Rated Speed	2200 rpm
Speed Ranges	0-14.5 km/hr
Bore	105 mm
Stroke	127 mm
Fuel Burn	
Low	6.8 Litres per hour
Medium	8.3 Litres per hour
High	10.2 Litres per hour

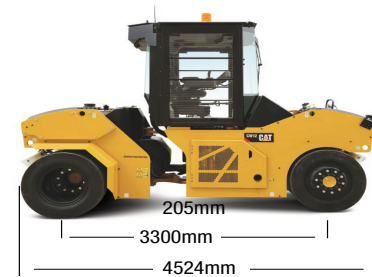

Tire size	14/70 x 20
Tire diameter	960 mm 38"
Tire overlap	84 mm 3"